


Snell 1771 Machine Tape

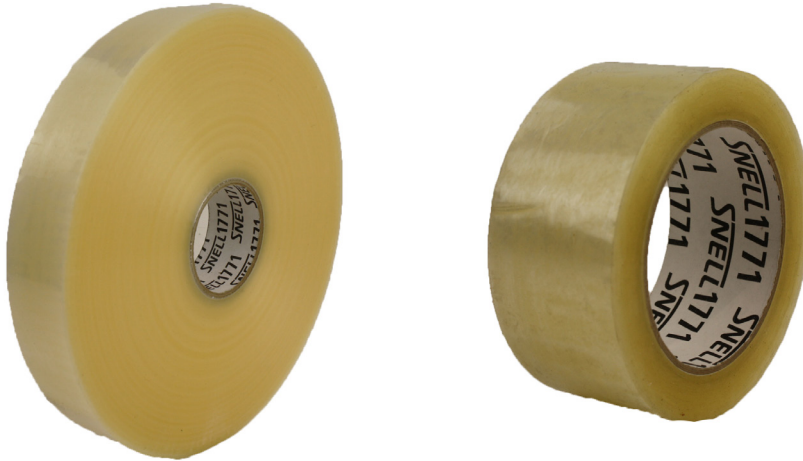

Product Codes : 12370M3615CL

12370M4815CL

Product Description:

Industrial sealing tape used for carton sealing, splicing and other packaging applications. High tensile strength and good moisture resistance. Ideal for sealing lightweight packages exposed to high distribution hazards or medium to heavy weight boxes exposed to minimal distribution hazards. Conformable polypropylene (BOPP) with synthetic rubber (hot melt) adhesive.

Size & Colour:

12370M3615CL: 36mm x 1500m Clear

12370M4815CL: 48mm x 1500m Clear

Features:

Adheres instantly to a variety of surfaces.

Edge tear and split resistance.

Good adhesion.

Roll to roll consistency increases productivity for improved unit costs.

Meets FDA requirements for indirect food contact.

Construction:

Film:	Polypropylene (BOPP)
Adhesive:	Synthetic Rubber
Film Thickness:	30mu
Adhesive Thickness:	18mu
Total Thickness:	48mu

Physical Properties:

Adhesive to Steel:	14 oz/inch	(Testing Method: ASTM D 3330)
Tensile (Machine Direction):	22lbs./inch	(Testing Method: ASTM D 3759)
Tensile (Cross Direction):	44lbs./inch	(Testing Method: ASTM D 3759)
Holding Power:	3500 min plus	(Testing Method: ASTM D 3654)
Peel Adhesion 180°:	1180g/inch	(Testing Method: ASTM D 3330)

Storage Conditions:

Store in a clean, dry place in moderate temperatures.

Shelf Life:

To obtain best performance, use this product within 18 months of manufacture.

Safety / Environmental Information:

MSDS Class:	S	Hazard Ratings:
Health:	1 0.	Minimal
Fire:	0 1.	Slight
Reactivity:	0 2.	Moderate
VOC:	N/A 3.	Serious
CONEG:	Complies 4.	Extreme

Does not contain any substances according to the Ozone Depleting Substances, 40CFR Part 82 and the Safe Drinking Water and Toxic Enforcement Act of 1986.

Packing:

12370M3615CL: 36mm x 1500m	8 rolls per carton	432 rolls per pallet
12370M4815CL: 48mm x 1500m	6 rolls per carton	324 rolls per pallet