

**PREMIUM VINYL
PACKAGING TAPE**

PRODUCT DATA SHEET

FPVC1
PREMIUM VINYL COLOURED
BAG NECK TAPE

DESCRIPTION

Unplasticised PVC (Vinyl) low stretch film coated with pressure sensitive rubber resin adhesive. Used in conjunction with Bag Neck Dispensers: #0497 & #0497S (stainless steel).

ADHESIVE	NATURAL RUBBER
BACKING	UPVC - UNPLASTICISED POLYVINYL CHLORIDE
COLOURS	RED, GREEN, BLUE, BLACK, YELLOW, WHITE



FEATURES



WATERPROOF PVC FILM

The extra strong PVC film is also water proof and will not tear or break.



TEAR RESISTANT

The extra strong FPVC1 will not tear or break.



HIGH VISIBILITY COLOURS

Comes in a range of vibrant colours that are excellent for packaging identification & colour coding.



SUITABLE FOR FREEZER CONDITIONS

Once applied correctly suitable for freezer conditions at - 20°C



SUITABLE FOR CARTON BOARDS

Excellent adhesive bond strength onto most carton board surfaces (testing always recommended).



USE WITH BAG NECK DISPENSERS

Ideal for use with bag neck dispensers: DISP-006 (small, silver or blue).

TYPICAL APPLICATIONS

- Secure sealing of polythene bags in retail and industrial situations.
- Sign writers masking tape for lettering and used as a colour coding / identification tape.
- For medium weight carton closure.
- Used in conjunction with Bag Neck Dispensers DISP-006 (small).

ADVANTAGES

QUICK & EASY TO USE

No clean up mess which occurs with liquid adhesives.

ECONOMICAL

Preparation time is minimal.
Installation is faster & waste is reduced.

SLIT TO SIZE IN NZ


Roll widths are slit to required sizes in New Zealand. Fast delivery to site throughout New Zealand.

FREE TECHNICAL ADVICE

Free technical assistance, samples and advice available throughout NZ from the tape spec sales team.



PACKAGING TAPE STRUCTURE

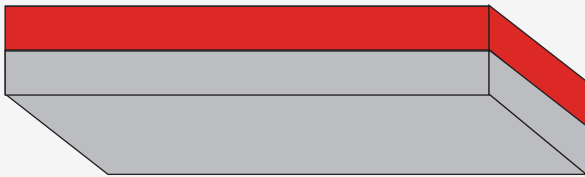

UPVC - Unplasticised polyvinyl chloride

Natural Rubber



Compatible with dispensers: DISP-006

PRODUCT

PREMIUM VINYL COLOURED BAG NECK TAPE

Available thickness: **58 MICRONS**

TECHNICAL INFORMATION

Backing	UPVC - Unplasticised polyvinyl chloride
Adhesive	Natural Rubber
Colours	Red, Green, Blue, Yellow, White, Black
Thickness Total thickness tolerance: + or - 2 microns	58 Microns PSTC 133
Tensile Strength	125 N/25mm PSTC 131
Elongation at break	70% PSTC 131
Adhesion to steel	4.5N /25mm PSTC 101
Service Temperature	0°C to 65°C Suitable for freezer conditions if applied outside the freezer in dry / clean conditions.
Storage Temperature	10°C to 25°C
Shelf life	12 months from manufacturer date.
Roll sizes	9 & 12mm x 66M

Slit to various width sizes as required.

NOTE: We recommend tape product testing to assess the suitability of the selected product to the end application & conditions. For surface preparation and guidelines please refer to our website www.tapespec.co.nz Advanced Tape Application Guide.

SURFACE SUBSTRATE CONDITION & PREPARATION

The surface on which the tape is to be used must be clean, dry and free from grease and dust.

Remember that pressure sensitive adhesive must be applied with the maximum possible pressure in order to achieve maximum adhesion levels.

The recommended application temperature is between 15°C and 25°C

PRODUCT USE

The information in this guide is based upon our knowledge & practical experience. This data is intended only as a source of information given without guarantee & does not constitute a warranty.

Due to the wide variety of possible uses & applications, customers should independently determine the suitability of these products for their specific purpose, prior to use. Trial samples are provided free of charge & without obligation.

For detailed surface preparation & application information please refer to our detailed Surface Condition & Preparation Guide.



Tapespec - Distributed by Acme

www.acme.co.nz — PH: 0800 226 369



www.tapespec.co.nz