


Polyester One Way Lashing

Code	Description	Break Strength	System strength	Length	packaging
CC-STRAPORANGE19MM	Woven Strap - Orange 19mm G76	1270kg	1530kg	400mtr	Coil - 2 per box
CC-STRAPORANGE32MM	Woven Strap - Orange 32mm G105	2000kg	3200kg	250mtr	Loose
CC-STRAPORANGE38MM	Woven Strap - Orange 38mm G150	3500kg	5600kg	200mtr	Loose
	<i>*table shows linear and system strength</i>				
	<i>**system strength subject to buckle type</i>				
CC-STRAPBUCKLE19MM	PhosphateWire Buckle 19mm (3/4") 4mm Gauge				500 per box
CC-STRAPBUCKLE32MM	PhosphateWire Buckle 32mm (1 1/4") 6mm Gauge				250 per box
CC-STRAPBUCKLE38MM	PhosphateWire Buckle 38mm (1 1/2") 7mm Gauge				150 per box
CC-STRAP S-50	Strapping Tensioner up to 50mm strap				
CC-STRAPR50-XXL	Strapping Tensioner up to 50mm strap HD Ratchet				

- One way strapping for securing on flats, rail and in containers.
- High tensile strength polyester woven strapping and lashing, 19-38mm (1530-5600kg system strength).
- Phosphated Wire Buckles protect material from wear and slipping.
- Manual and Ratchet HD tensioners



CC-STRAPR50-XXL

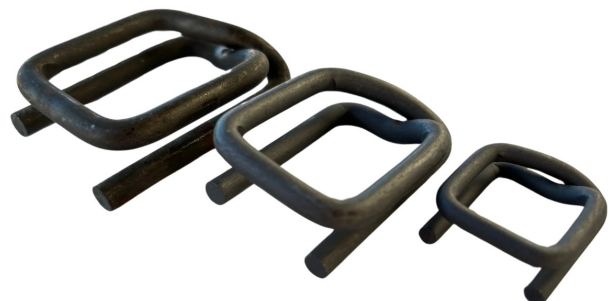

CC-STRAP S-50

New Zealand Head Office
 17 Andrew Baxter Drive
 Airport oaks, Mangere
 Auckland NZ 2022
 P: +64 09 639 2080
 E: sales @ancranz.com