

3M™ 9923V, P2 Particulate Respirator

Technical Data Sheet

Description

The 3M™ 9923V is a disposable specialty respirator with P2 rated filtration that offers protection from hazards such as coal dust, diesel particulate matter, other dusts, mists and fumes. The added carbon layer effectively reduces exposure to odours and unburned fuel vapours such as those from heavy machinery equipped with diesel engines.

Features

- Provides protection against mechanically and thermally generated particulates
- Non-aluminium nose-clip specifically for use in intrinsically safe environments e.g. coal mines
- Activated carbon filter provides relief from nuisance levels* of organic vapours and odours
- 3M™ Cool Flow™ exhalation valve offers improved comfort in hot humid environments and/or where work is hard and physical
- Disposable and maintenance free
- 3M™ High performance Filter Media provides effective filtration of particles combines with low breathing resistance for consistent high performance
- Nose foam is soft on the wearer's skin
- Traditional cup design with robust shell that is resistant to collapse for durability

Materials

The following materials are used in the production of 3M™ 9923V respirator:

Component	Material
Head Straps	Polyester / Polyisoprene
Staples	Steel
Nose Foam	Polypropylene - ester
Nose Clip	Galvanised Steel
Filter	Polyester / Polypropylene / Carbon
Valve	Polypropylene
Valve Diaphragm	Polyisoprene



This respirator does not contain components made from natural rubber latex.

Maximum mass of respirator = 15g

Standards

3M™ 9923V respirator meets the performance requirements of AS/NZS 1716:2012. Class P2 is the rating given to a respirator that meets AS/NZS 1716:2012 for filtering mechanically and thermally generated particles e.g. those from welding fume.

Approvals

3M™ 9923V respirator has been produced to comply with the requirements of Australia/New Zealand Standard AS/NZS 1716:2012 under an agreed production certification scheme operated during manufacture in accordance with the SAI Global StandardsMark™ programme.

Storage and Transportation

The 3M™ 9923V Specialty Series Respirator has a shelf life of 3 years. End of shelf life is marked on the product packaging. Before initial use, always check that the product is within the stated shelf life (use by date). Product should be stored in clean, dry conditions within the temperature range: – 20°C to + 25°C with a maximum relative humidity of <80%. When storing or transporting this product use original packaging provided.

* Nuisance levels are those levels below the Workplace Exposure Standard(WES)/Workplace Exposure Limit (WEL)

Applications

3M™ 9923V respirator is suitable for use in concentrations of solid and non-volatile liquid particles up to the following limit:

Model	AS/NZS 1716:2012 Classification	Exhalation Valve	Protection Factor x WES	Gas
9923V	P2	Valved	10	Organic Vapours (<WES)

WES = Workplace Exposure Standard(WES)/Workplace Exposure Limit (WEL)

Respiratory protection is only effective if it is correctly selected, fitted and worn throughout the time when the wearer is exposed to hazards.

3M™ 9923V respirator is suitable for the following suggested applications (but is not limited to):

- Mining - including underground coal mining and metalliferous
- Diesel particulate matter
- Work sites using machinery equipped with diesel fuel
- Workers exposed to odours and unburned fuel vapours
- Lead fumes
- Welding

Respiratory protection is only effective if it is correctly selected, fitted and worn throughout the time when the wearer is exposed to hazards.

Important

- Before use, the wearer must be trained in use of the complete product in accordance with AS/NZS 1715:2009 and other applicable Health and Safety standards/guidance.
- Proper selection, training, use and appropriate maintenance are essential in order for the product to help protect the wearer from certain airborne contaminants.
- Failure to follow all instructions and limitations on the use of the respirator and/or failure to wear the respirator during all times of exposure can reduce respirator effectiveness and may result in sickness or death.
- For suitability and proper use follow local regulations and refer to all information supplied. For additional assistance, contact an Occupational Hygienist, Safety professional or 3M Customer Service Australia 1300 363 565 3msupport.safety.au@mmm.com New Zealand 080252 627 3msupport.safety.nz@mmm.com.
- Do not use in atmospheres containing less than 19.5% oxygen, as the respirator does not supply oxygen. (3M definition - individual countries may apply their own limits on oxygen deficiency. Seek advice if in doubt.) Do not use for respirator protection against atmospheric contaminants/concentrations which are unknown or immediately dangerous to life and health (IDLH).

It is recommended that wearers be fit tested in accordance with AS/NZS 1715:2009 Standard. For information regarding fit testing procedures, please contact 3M.


Fitting Instructions

Must be followed each time the respirator is worn. Before fitting device, ensure hands are clean.

See Figure 1 below.

1. Cup respirator in one hand with nosepiece at fingertips, allow headbands to hang freely below hand.
2. Hold respirator under chin, with nosepiece up.
3. Locate the upper strap across the crown of the head and the lower strap below the ears.
4. Straps must not be twisted.
5. Using both hands, mould noseclip to the shape of the nose to ensure a close fit and good seal. Pinching the noseclip using only one hand may result in less effective respirator performance.
6. The seal of the respirator on the face should be fit-checked before entering the workplace. Refer to Fit Check section.

Figure 1

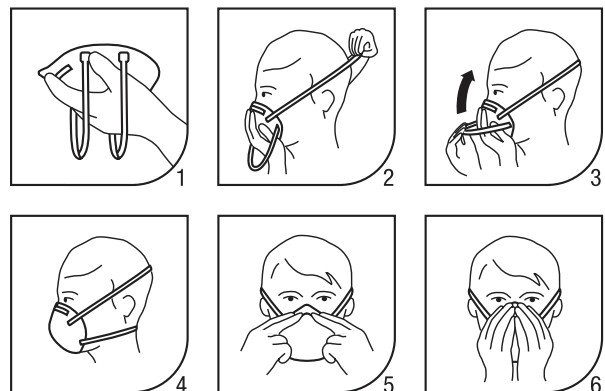

Fit Check

1. Cover the front of the respirator with both hands being careful not to disturb the fit of the respirator.
2. (a) UNVALVED respirator - EXHALE sharply;
(b) VALVED respirator - INHALE sharply.
3. If air leaks around the nose, re-adjust the nose clip to eliminate leakage. Repeat the above fit check.
4. If air leaks at the respirator edges, work the straps back along the sides of the head to eliminate leakage. Repeat the above fit check.

If you CANNOT achieve a proper fit DO NOT enter the hazardous area. See your supervisor.

Warnings and Use Limitations

Always be sure that the complete product is:

- Suitable for the application;
- Fitted correctly;
- Worn during all periods of exposure;
- Replaced when necessary.
- It is recommended that fit testing be conducted before assigning a respirator to an individual. If you cannot achieve a proper fit then do not enter contaminated area. See your supervisor.
- Inspect respirator before each use to ensure it is in good working condition. Examine all the respirator parts for signs of damage including the two straps, noseclip, nose foam and staples. The respirator should be disposed of immediately upon observation of damaged or missing parts. The respirator should be disposed of immediately upon observation of damaged or missing parts.
- Leave the contaminated area immediately and contact supervisor if dizziness, irritation or other distress occurs.
- Dispose of used product in accordance with applicable regulations.
- All respirators should be used in accordance with local regulations.
- Do not alter, repair, wash, and abuse or misuse the respirator.
- Do not use with beards or other facial hair or other conditions that prevent a good seal between the face and the sealing edge of the respirator.
- The respirator can help protect the wearer's lungs against certain airborne contaminants; however, it will not prevent entry through other routes such as the skin or eyes, which would require additional personal protective equipment (PPE).
- The respirator is designed for occupational/professional use by adults who are properly trained in their use and limitations. The respirator is not designed to be used by children.
- Individuals with a compromised respiratory system, such as asthma or emphysema, should consult a physician and complete a medical evaluation prior to use.
- Operating Temperature Range: -20 to +50 degrees Celsius.
- The filtration efficiency of the respirator may decrease in the presence of oily mists.
- This product does not contain components made from natural rubber latex.

Ordering Information

SAP ID	Legacy ID	Availability		Model #	Description
		AUS	NZ		
7100017433	WX700901902	•	•	9923V	3M™ Particulate Respirator 9923V, P2, with Nuisance Level Organic Vapour Relief, Valved, 10 ea/Box, 6 Boxes/Case

Warning

Respirators must not be used until your employer has determined whether usage will be in accordance with manufacturer's instructions. The wearer must be trained in the proper fitting and use of this product. Failure to follow all instructions and warnings on the use of this product and/or failure to wear this respirator during all times of exposure can reduce respirator effectiveness and result in illness or death. All respirators should be used in accordance with Australia/ New Zealand standard AS/NZS 1715. It is recommended that fit testing be conducted before assigning a respirator to an individual. If you cannot achieve a proper fit, do not enter contaminated areas. Do not use with beards or other facial hair or conditions that prevent a good seal between the face and the sealing surface of the respirator.

Important Notice

To the extent permitted by law, 3M shall not be liable for any loss or damage including any loss of business, loss of profits, or for any indirect, special, incidental or consequential loss or damage arising from reliance upon any information herein provided by 3M. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence.



3M Australia Pty Ltd
Personal Safety Division
Bldg A, 1 Rivett Road
North Ryde NSW 2113
Customer Service: 1300 363 565
Email: 3msupport.safety.au@mmm.com
Web: www.3M.com/au/ppesafety

3M New Zealand Ltd
Personal Safety Division
94 Apollo Drive, Rosedale
Auckland 0632
Customer Service: 0800 252 627
Email: 3msupport.safety.nz@mmm.com
Web: www.3M.com/nz/ppesafety

3M & Cool Flow are trademarks of 3M Company.
© 3M 2025. All rights reserved.